


1. PRODUCT IDENTIFICATION

Trade name	Rubber curb ramp H-5 cm – 500 × 250 × 50 mm
Base material	High-density recycled rubber
Colour and visibility	Black, with yellow retroreflective elements
Intended use	Bridging kerbs and thresholds up to 50 mm – for wheelchairs, prams, bicycles and cars; garages, car parks, shops, warehouses.
Manufacturer	TERENO ECO Ltd, Straldzha, Bulgaria



Curb ramp H-5

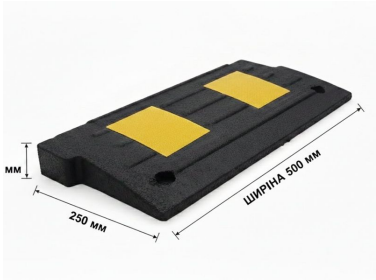

Installed ramps

2. DIMENSIONS AND WEIGHT

Parameter	Value
Length × depth × height	500 × 250 × 50 mm
Weight (approx.)	5 kg
Fixing	loose-laid or anchored

3. CHARACTERISTICS

Drainage channels underneath; anti-slip top surface.
When used as an accessibility element, slope and position follow Bulgarian Ordinance No. RD-02-20-2 of 2021.

4. INSTALLATION AND MAINTENANCE

Substrate: level and clean.
Installation: place the ramp tight against the kerb; for permanent installation fix it with anchors.
Inspection: periodically check the fixing.

5. NOTES

Values are nominal and given for customer information. This data sheet is not a declaration of performance. It is valid from its issue date and supersedes all previous data sheets for the product. Approved by: Valeri Donchev, Managing Director.