


1. PRODUCT IDENTIFICATION

Trade name	Speed Stop road stud H-5 cm - Ø 210 mm
Base material	Rubber
Colour and visibility	Black, with a yellow retroreflective element
Intended use	Spot speed-reducing studs – car parks, garages, warehouses, areas near pedestrian crossings.
Manufacturer	TERENO ECO Ltd, Straldzha, Bulgaria

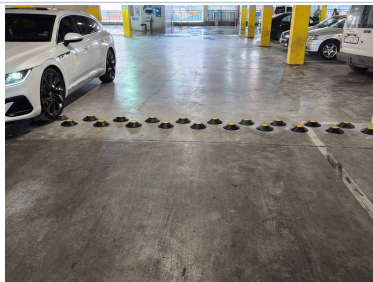

Installed Speed Stop studs

2. DIMENSIONS AND WEIGHT

Parameter	Value
Diameter	210 mm
Height	50 mm
Weight (approx.)	1.2 kg

3. CHARACTERISTICS

Installed in a row across the carriageway, through the factory holes.

On roads open to public traffic, the location of road humps is set by an approved traffic management design – the road owner's responsibility.

4. INSTALLATION AND MAINTENANCE

Substrate: asphalt or concrete, cleaned.

Installation: mark the positions, drill and clean the holes and fix the studs with anchors through the factory holes.

Inspection: periodically check anchor tightness.

5. NOTES

Values are nominal and given for customer information. This data sheet is not a declaration of performance. It is valid from its issue date and supersedes all previous data sheets for the product. Approved by: Valeri Donchev, Managing Director.